

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number
WO 2005/064815 A1

(51) International Patent Classification⁷: **H04B 7/005**,
H04Q 7/38

(74) Agent: **STRÖM & GULLIKSSON IP AB**; Lindholm-
spiren 5, S-417 56 Göteborg (SE).

(21) International Application Number:
PCT/SE2004/000125

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 29 January 2004 (29.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PCT/SE2003/002093
29 December 2003 (29.12.2003) SE

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (*for all designated States except US*): **TELEFONAKTIEBOLAGET L M ERICSSON (publ)**
[SE/SE]; S-126 25 Stockholm (SE).


(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **CARLSSON, Roland** [SE/SE]; Skottvägen 3, S-433 50 Öjersjö (SE).
ANKEL, Pär [SE/SE]; Gullsäter 36, S-449 30 Nödinge (SE).

Published:
— with international search report

[Continued on next page]

(54) Title: METHOD AND ARRANGEMENT RELATING TO COMMUNICATIONS NETWORK

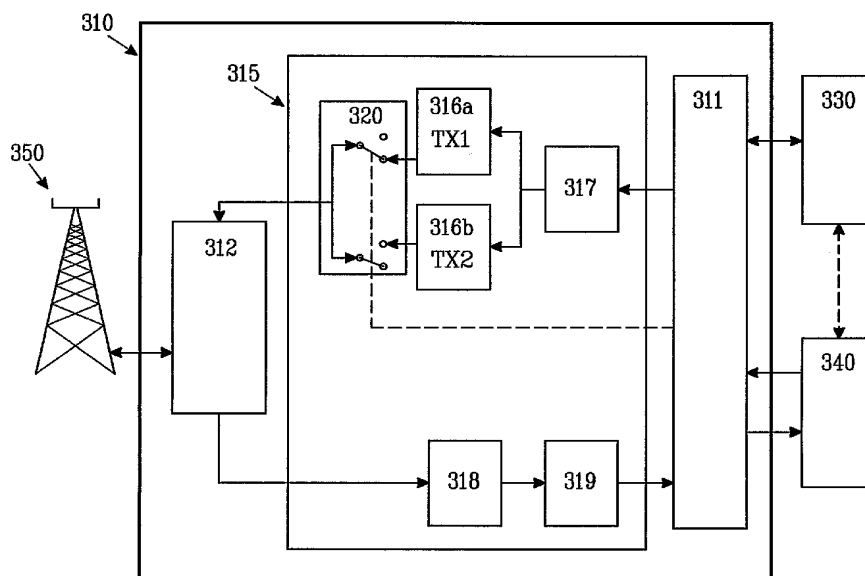

(57) Abstract: The present invention relates to a method and arrangement for downlink power adjustment in a base station (210, 310, 610) comprising at least two similar hardware units: a first unit (231, 316a, 616a) and a second unit (232, 316b, 616b), in a communications network when moving a resource from said first unit to said second unit. The method comprises configuring said resource, providing a sample of a power level, transferring said power sample from said first unit to said second unit, and controlling the power level on the second unit towards a power value provided as a power level with turned off output power on said second unit.

WO 2005/064815 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.